


SMART
LAUNDRY
TECHNOLOGY



Flatwork Ironer

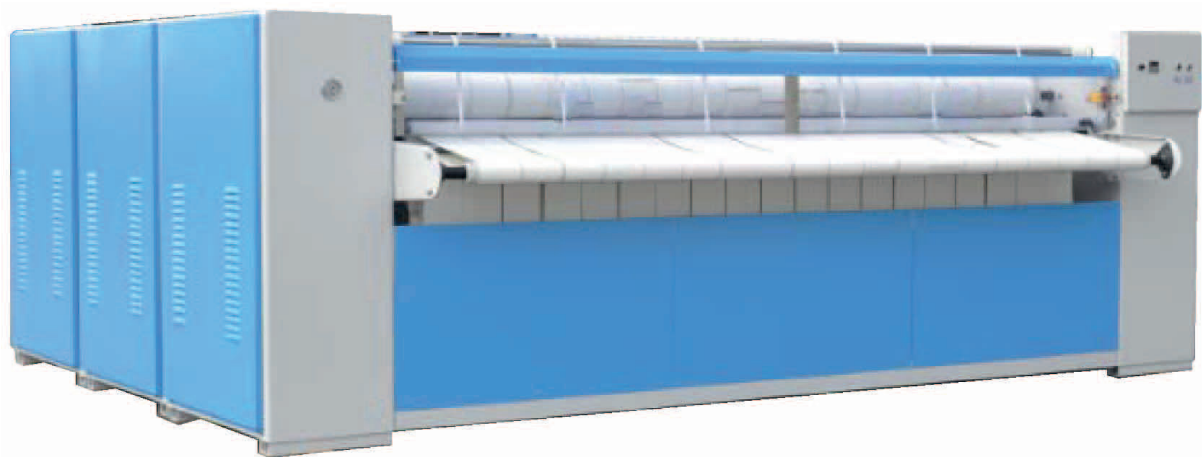

WI SERIES
MODEL
VER201402

- ❖ Heating type: Steam/Electric
- ❖ 1-5 Roller is available

SPECIFICATION

MODEL	ROLLER QTY	WORKING WIDE
WI2500	1	2500
WZI2800	1	2800
WZI3000	1	3000
WZI3300	1	3300
WZII2800	2	2800
WZII3000	2	3000
WZII3300	2	3300
WZIII3000	3	3000
WZIII3300	3	3300
WZIV3300	4	3300

FEATURES

OPTIMIZED DESIGN OF ROLLER, EXCELLENT EFFICIENCY TRANSMISSION
 COULD ADJUST THE SPEED IN GOOD CONDITION
 BIG COVER OF BEARING SYSTEM AND INDEPENDENT WATER OUTLET VALVE AIR PRESSURE
 PROTECTIVE CONTROLLER AND OTHER MULTI PROTECTIVE DEVICE IN THE MACHINE
 MODULAR DESIGN, EASY TO ADD OR REDUCE THE NUMBER OF ROLLERS
 ACCORDING TO THE REQUIRED CAPACITY



SPECIFICATIONS

EFFICIENT

- Optimization of the drive roller arrangement, more concise and efficient
- Optimal chain drive mechanism, reliable and durable
- Standardized bearing for smoothly running
- 300° Big rotating joint of bearing ensure wider ironing area for saving energy

SAFE

- Crystal baffle plate and limited switch in feeding area, easy to observe running condition. If stuck, the machine will stop running automatic ally
- Multiplex emergency switch around the machine to prevent accidents
- Visible fitting part with red paint for carrier, which are easy to remove
- Pressure controlled Pneumatic steam inlet valve, will stop inlet once the pressure get higher

CONVENIENT

- Self-adjusting instruction keep smooth running when the belt get loose.

USER-FRIENDLY DESIGN

- With a large main bearing and oil feeding, it is easy to feed the lubricate the machine
- Slotted and oil injectable bearing structure is for easy oil feeding

USER-FRIENDLY STRUCTURE

- Self-suitable leashes elastic mechanism, adjusts the mechanism suited for the extension of leashes
- Elastic device in linen feeding area to control the extension of belt for smoother ironing result
- Beside the button of invertor, also installed motor speed button ensure normal running when the fault of Invertor button

CONVENIENT

- Adding and reducing the number of rolls is possible. It is easy to change two rollers to three or four rollers easily.

RELIABLE

- The roller is made of precise seamless tube to ensure precision and reliable performance
- The roller is galvanized for anti-corrosion and being wrapped by stainless steel tube to prolonged life

Model	Unit	WI-2500	WI-2800	WI-3000	WI-I2800	WI-I3000	WI-II3000
Roller	Piece	1	1	1	2	2	3
Heating Type		Steam/Electrical	Steam/Electrical	Steam/Electrical	Steam/Electrical	Steam/Electrical	Steam/Electrical
Roller (Dia)	mm	Ø800	Ø800	Ø800	Ø800	Ø800	Ø800
Ironing Wide	mm	2500	2800	3000	2800	3000	3000
Speed	m	0-10	0-10	0-10	0-20	0-20	0-25
Motor Power	kw	1.1	1.1	1.1	1.5	1.5	2.1
Steam Inlet	mm	40	40	40	40	40	40
Steam consumption	Kg/h	100	110	120	200	220	310
Steam Pressure	bar	4-6	4-6	4-6	4-6	4-6	4-6
Water outlet	mm	20	20	20	20	20	20
Power supply	50/60hz	380-415V/3P	380-415V/3P	380V-415V/3P	380-415V/3P	380-415V/3P	380-415V/3P
Weight	kg	1600	1650	1700	3100	3200	4000
Dimension	mm	3700x1435x1420	4000x1430x1420	4200x1435x1420	4000x2385x1420	4200x2385x1420	4500x3335x1420

